

92

AGD series

92X92X25mm

●General Specification / 一般規格


- Motor / DC brushless motor
- Material / Frame : plastic(94V-0)
Impeller : plastic(94V-0)
- Bearing / Ball bearing;FMB
- Weight / 89g
- 馬達 / 直流單向無刷馬達
- 材質 / 框：塑膠(94V-0)
葉：塑膠(94V-0)
- 軸承 / 滾珠軸承;FMB
- 重量 / 89克



●Specification / 詳細規格 *軸承/bearing B: 雙滾珠/ball bearing F:FMB S: 含油承軸/sleeve bearing

Model	Bearing	Voltage	Operating Vol.	Current	Speed	Max. Air Flow	Max. Static Pressure	Sound	Weight		
機型	軸承	電壓	操作電壓	電流	轉速	最大風量	最大風壓	噪音	重量		
P/N	B/S/F	V	V	A	RPM	m ³ /min	CFM	mm-H ₂ O	In-H ₂ O	dBA	g
AGD09225*12J	B	12	6.0~13.2	0.10	1800	1.20	42.46	2.22	0.09	23.56	89
AGD09225*12L	B	12	6.0~13.2	0.12	2300	1.48	52.39	3.33	0.13	28.47	89
AGD09225*12M	B	12	6.0~13.2	0.21	2800	1.82	64.12	4.81	0.19	32.87	89
AGD09225*12H	B	12	6.0~13.2	0.32	3300	2.18	77.15	6.72	0.26	37.85	89
AGD09225*12U	B	12	6.0~13.2	0.40	3800	2.50	88.37	8.89	0.35	41.79	89
AGD09225*12V	B	12	6.0~13.2	0.90	4800	3.11	109.7	13.33	0.52	48.32	89
AGD09225*24J	B	24	12.0~26.4	0.08	1800	1.20	42.46	2.22	0.09	23.56	89
AGD09225*24L	B	24	12.0~26.4	0.10	2300	1.48	52.39	3.33	0.13	28.47	89
AGD09225*24M	B	24	12.0~26.4	0.12	2800	1.82	64.12	4.81	0.19	32.87	89
AGD09225*24H	B	24	12.0~26.4	0.18	3300	2.18	77.15	6.72	0.26	37.85	89
AGD09225*24U	B	24	12.0~26.4	0.25	3800	2.50	88.37	8.89	0.35	41.79	89
AGD09225*24V	B	24	12.0~26.4	0.40	4800	3.11	109.7	13.33	0.52	48.32	89

● Drawing & panel out-cuts/ 圖面及出入風口

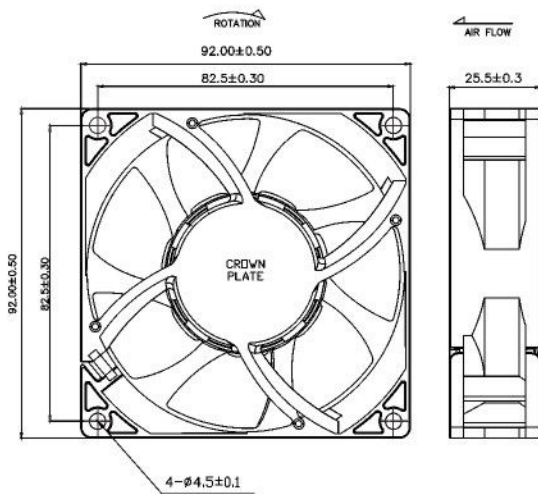

● Characteristic Curves/ 特性曲線

